


FeltBuster® Synthetic Roofing Felt

Helps protect the roof system from wind-driven rain
and other damaging moisture



- Provides a critical layer of extra protection between shingle and the roof deck to resist wind-driven rain or moisture from other sources
- A durable, long-lasting upgrade over the conventional asphalt felts that can tear or degrade over time
- Avoids water absorption that can lead to ugly wrinkling that “telegraphs” through the shingles

FeltBuster® Synthetic Roofing Felt

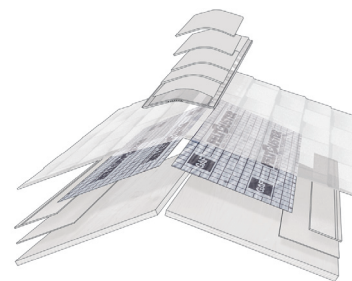

Benefits:

- **Special spunbond surface** provides excellent traction for installers versus typical asphalt felts
- **Tough, synthetic construction** helps resist tearing underfoot and in high winds
- **Competitively priced per square** with typical asphalt felts (price varies by market)
- **Non-asphaltic polypropylene construction** delivers long-lasting performance and won't rot or degrade like conventional asphalt felts
- **Super-lightweight**, 10-square roll is easy to handle on the roof
- **Medium-gray surface** is cooler to work with versus conventional black asphalt felts and the leading black low-cost synthetic underlayment
- **Eligible for up to a Lifetime[†] Limited Warranty** when installed with GAF Lifetime[†] shingles and at least two additional qualifying GAF accessories, and it's eligible for residential enhanced warranty coverage²



Product details:

Nominal Specifications:

For use with asphaltic shingles.

- **Roll size:** 10 squares (1,000 sq. ft. [92.9 m²]) (excludes laps)
- **Roll width:** 48" (1.22 m)
- **Roll length:** 250' (76.2 m)
- **Approx. roll weight:** 23 lb. (10.4 kg)
- **UV exposure:** UV-stabilized polypropylene construction resists UV degradation for up to 90 days¹

Code Approvals:

- Meets or exceeds the physical requirements of ASTM D226 Type II, ASTM D8257, and ASTM D4869 Types III and IV
- Miami-Dade County Product Control Approved
- State of Florida Approved
- Meets or exceeds CSA A220.1 Underlayment Performance Requirements
- Listed with Texas Department of Insurance as an acceptable alternate roof underlayment
- Meets or exceeds ICC-ES Acceptance Criteria AC188
- ICC-ES Evaluation Report (ESR-2808)
- Meets certain FORTIFIED Roof™ requirements. Visit gaf.com/Fortified and current FORTIFIED Home™ Standard available at fortifiedhome.org for details. U.S. only.

[†] Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any *GAF Lifetime Shingle* and at least 3 qualifying GAF accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the GAF Roofing System Limited Warranty, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

¹ 90-day UV resistance refers to standardized testing conducted to ensure the product will not physically degrade when exposed to UV. It is **NOT** related to withstanding water, snow, or wind. While FeltBuster® Synthetic Roofing Felt is water resistant, it is **NOT WATERPROOF**. **DO NOT USE** FeltBuster® Synthetic Roofing Felt as a temporary roof to protect property or possessions.

² See *GAF System Plus, Silver Pledge™* or *Golden Pledge® Limited Warranty* for complete coverage and restrictions.

Note: Always install FeltBuster® Synthetic Roofing Felt using plastic cap nails or plastic cap staples. Do **NOT** use nails or staples without caps.



To learn more about the Lifetime[†] Roofing System, visit gaf.com/Lifetime



We protect what matters most™

